

Evaluating a Signalized Intersection Performance Using Unmanned Aerial Data*

Mujahid I. Ashqer¹, Huthaifa I. Ashqar^{2,3}, Mohammed Elhenawy⁴, Mohammed Almannaa⁵,
Mohammad A. Aljamal⁶, Hesham A. Rakha⁷, and Marwan Bikdash⁸

Abstract—This paper presents a novel method to compute various measures of effectiveness (MOEs) at a signalized intersection using vehicle trajectory data collected by flying drones. MOEs are key parameters in determining the quality of service at signalized intersections. Specifically, this study investigates the use of drone raw data at a busy three-way signalized intersection in Athens, Greece, and builds on the open data initiative of the *pNEUMA* experiment. Using a microscopic approach and shockwave analysis on data extracted from real-time videos, we estimated the maximum queue length, whether, when, and where a spillback occurred, vehicle stops, vehicle travel time and delay, crash rates, fuel consumption. Results of the various MOEs were found to be promising, which confirms that the use of traffic data collected by drones has many applications. We also demonstrate that estimating MOEs in real-time is achievable using drone data. Such models can track individual vehicle movements within street networks and thus allow the modeler to consider any traffic conditions, ranging from highly under-saturated to highly over-saturated conditions. These microscopic models have the advantage of capturing the impact of transient vehicle behavior on various MOEs.

Index Terms—Measures of effectiveness (MOEs); Signalized intersection; Unmanned Aerial Vehicles (UAVs); Drones; Traffic data

I. INTRODUCTION

Signalized intersections are major elements in causing abrupt changes in traffic patterns that lead to high traffic delays, fuel consumption, and emissions. Roadways often experience operational restrictions when they have signalized intersections. As a result, the control systems put in place to manage the right of way should consider both the specific location's requirements and the network's overall standards. For each approach at the intersection to be effective, several requirements must hold true, and the duration of the traffic signal should be optimized based on interconnected variables. Vehicle acceleration and speed change dramatically during the operation of signalized intersections. It depends on each driver's behavior how they decelerate, stop, and move

through the intersection's queue before accelerating to clear an intersection. When it is noticed that there is no right of way at the signal, some drivers may accelerate more strongly, while others may decide to begin decelerating very early. Aggressive drivers, for example, may accelerate during the amber phase to get through the intersection more quickly, while drivers who are more cautious may decide to slow down or even break suddenly to avoid passing the stop sign once the red phase begins. However, traffic signals are crucial in increasing traffic safety along the intersection by avoiding conflicts of various movements. Traffic engineers carefully design traffic signal controllers to efficiently operate traffic movements with the aim of minimizing traffic queues, delays, fuel consumption, and emissions. Traffic demand data is used by traffic signal controllers to determine how traffic should move through the intersection. This information can be fed from different detection techniques, such as the traditional inductive loop detectors and camera systems. Recently, researchers have developed traffic signal controllers using advanced detection techniques such as probe vehicles (vehicles with GPS/Bluetooth devices and connected vehicles) [1]. These advanced techniques allow traffic signal controllers to use real-time information that assists in improving traffic stream efficiency.

Using vehicles' trajectory extracted from Unmanned Aerial Vehicles (UAVs) (i.e., drones) at a busy signalized intersection in Athens, Greece, this study investigates the use of UAVs data to determine measures of effectiveness (MOEs) for signalized intersections including the maximum queue length, whether, when, and where a spillback occurred, vehicle stops, vehicle travel time, delay, crash rates, and fuel consumption. The UAVs technology has shown a promising future in a wide range of applications such as transportation, security, monitoring, survey,

*Part of this work was submitted as Virginia Tech's team to IEEE ITSC 2020's UAS4T Competition and has won the first place. More information can be found at <https://open-traffic.epfl.ch/index.php/2020/09/24/uas4t-competition-results-and-codes/>.

¹ Ph.D. candidate at Computational Data Science and Engineering at North Carolina AT State University, USA. (email: miashqer@ncat.edu).

² Precision Systems, Inc., USA (email: hiashqar@vt.edu).

³ Arab American University, Palestine (email: Huthaifa.ashqar@aaup.edu)

⁴ Research Fellow at CARRS-Q, Queensland University of Technology, Australia. (email: mohammed.elhenawy@qut.edu.au).

⁵ Assistant Professor at Civil Engineering Department, King Saud University, Saudi Arabia. (email: malmannaa@ksu.edu.sa).

⁶ Manager at Grant Thornton LLC, USA. (email: m7md92@vt.edu).

⁷ Samuel Reynolds Pritchard Professor of Engineering, Charles E. Via, Jr. Dept. of Civil and Environmental Engineering and the Bradley Department of Electrical and Computer Engineering (courtesy), Director of the Center of Sustainable Mobility, VTTI, Virginia Tech. (email: hrakha@vt.edu).

⁸ Professor and Chair at Department of Computational Data Science and Engineering at North Carolina AT State University, USA. (email: bikdash@ncat.edu).

environmental mapping, etc. Furthermore, UAVs technology is easy to deploy, introduces minimum interruptions to the studied area's traffic stream, and is relatively low-cost to maintain.

Traffic delays and queues are principal measures for determining the capacity and the traffic quality of service of signalized intersections. Calculating the number of vehicles and the queue length helps estimate the performance measures of an intersection. Many studies have used several methods to estimate the elements of MOEs, including using the Kalman Filtering technique to estimate the number of vehicles traveling along signalized approaches using real-time probe vehicle data [1, 2] and applying Lighthill–Whitham–Richards (LWR) shockwave theory [3]. Liu et al. used LWR shockwave theory to identify traffic state changes that distinguish queue discharge flow from upstream arrival traffic. Moreover, Ban et al. proposed methods to estimate real-time queue lengths at signalized intersections using sample travel times from mobile traffic sensors. The estimation was based on the observation that critical pattern changes of intersection travel times or delays. The model and algorithm were tested using field experiments and simulation data [4].

Traffic delays and queues are key parameters in determining the quality of service of signalized intersections. In this study, we used a microscopic approach and shockwave analysis on data extracted from a real-time video, which were collected using a drone, to characterize the various MOEs on a signalized approach for a three-way signalized intersection in Athens, Greece. Specifically, for the specified area in green shown in Fig. 1, we used Unmanned Aerial Data to estimate the measures of effectiveness, including the maximum queue length, whether, when, and where a spillback occurred, vehicle stops vehicle travel time, and delay, crash rates, and fuel consumption.

II. RELATED WORK

Numerous studies were conducted on UAV video data to analyze and improve transportation networks. Recent research efforts utilized UAV datasets to detect queue and estimate its length on freeways and intersections [5, 6], identify and track heavy vehicles [7], investigate crash risk [8], detect hazard obstacles and accidents [9, 10], and better monitor traffic violations [11]. In the area of estimating queue lengths using UAV data, there are limited efforts conducted at signalized intersections. Freenmn et al. employed UAV to capture the traffic formulation at two signalized intersections in Kuwait [12]. They first utilized two drones to capture the entire area around the intersection while it was fully congested. Two periods with different traffic volumes were used. The authors were able to estimate the stationary stacking headway for individual vehicles, and types of vehicles were estimated. However, this study only used static UAV video and measured the stacking gab graphically at a stationary status.

Khan et al. has used UAV video data to develop analytical methodology at four-way intersections in Sint-Truiden, Belgium [7]. The authors extracted the individual trajectories of vehicles and drew the flow fundamental diagrams, dividing them into three states. Afterward, they conducted a shockwave analysis macroscopically and calculated the queue length for each direction based on the flow fundamental diagrams and shockwave analysis. Yet, the authors did not investigate and consider the microscopic level to calculate the queue length and other MOEs. Ke et al. adopted Machine Learning (ML) techniques such as K-means and Kanadelucas-Tomasi algorithms to estimate both macroscopic and microscopic traffic parameters [13]. Although they have achieved a high accuracy, the computational time remains an obstacle for ML algorithms, especially when it comes to estimating the real-time queue length. In a different research effort, Ke et al. proposed a framework to estimate seven traffic flow fundamental parameters for both macroscopic and microscopic levels, yet queue length and other MOEs were not investigated [14].

Unlike the previous related works, this study proposes a microscopic methodology to estimate the MOEs of an approach in a signalized intersection using UAV data. Specifically, our approach can be used dynamically for real-time estimation of MOEs using UAV data, which could be used for traffic management applications. Our approach uses a microscopic method based on shockwave analysis, which considers the mobility and interaction of individual vehicles and deemed to be more accurate than macroscopic methods. While our approach is believed to achieve high accuracy in estimating MOEs, it effectively accomplishes that with a relatively less computational complexity and time.

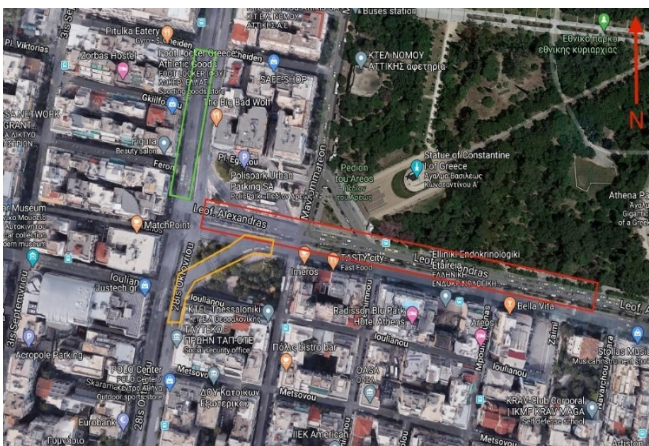


Fig. 1: Study area (Map data ©2021 Google).

III. DATASET

This study used a 14-min video, which was recorded by a UAV at a three-way signalized intersection in Athens, Greece, as shown in Fig. 1 and Fig. 2. The video was filmed in sunny weather by a drone hanging over a sufficiently high point at the center of the intersection to cover three approaches as follows: 1) Leof. Alexandras Road, with direction towards the west to 28is Oktovriou Road (Red polygon with 300m length), 2) 28is Oktovriou Road, with direction towards north to Leof. Alexandras Road (Yellow polygon with 100m length), and 3) 28is Oktovriou Road, with direction towards south to 28is Oktovriou Road (Green polygon with 100m length). The geometric design of the intersection consists of five lanes (including a left-turn pocket) for the green polygon, three lanes for the red one, and two lanes for the orange one. The red polygon contains two additional traffic signals, and the speed limit for the three polygons is 55 km/h (34 mph).

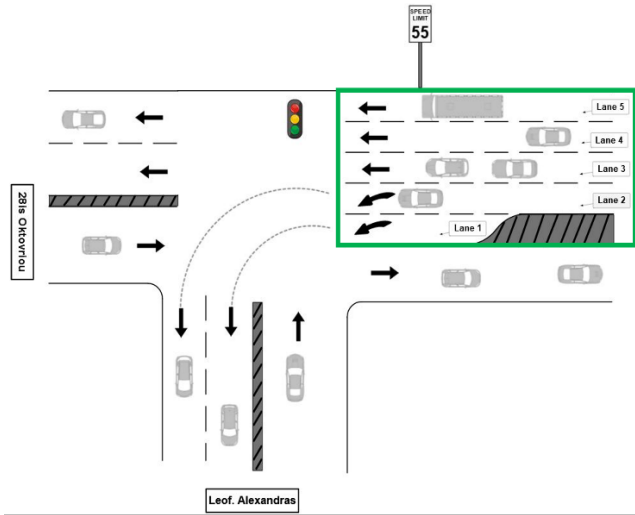


Fig. 2: Intersection layout.

The video was then converted to second-by-second trajectories for all types of vehicles, including cars, taxis, powered two-Wheeler's, buses, and medium and heavy vehicles as shown in Fig. 3. Each trajectory has a unique tracking ID with vehicle type in addition to initial traveled distance and average speed (once they enter the polygon). Each point in the trajectory has a timestamp (in seconds), instantaneous latitude and longitude, instantaneous vehicle speed, instantaneous latitude, and longitude acceleration/deceleration. These features were utilized to identify the starting of each point of the trajectory and determine the lane allocations for each vehicle. More information on the methodology will be provided in the following two sections.



Fig. 3: Illustration of extracted trajectories.

The first step in using the UAV data entailed utilizing Google Earth to divide each polygon into smaller subpolygons representing the lanes in the green area shown in Fig. 1 and Fig. 2. We used a Keyhole Markup Language (KML) file, which is an international standard maintained by the Open Geospatial Consortium, Inc. (OGC), to display the geographic data from Google Earth. KML files were created by pinpointing the resulted locations of adding an image overlay of the study area. This geographic data was used in identifying the lane (i.e., sub-polygon) that the vehicles were on during their trip within the green-defined area. Keeping in mind that many vehicles may change their lane multiple times during their trip, the instantaneous longitude and latitude of each vehicle. That said, in order to validate the lane allocations at the upstream edge of the defined area and after leaving the downstream, the origin-destination of each trajectory was identified, and the mismatched values were corrected. Subsequently, a lane-specific time-space diagram was created using vehicle trajectories that were associated with the determined sub-polygon (i.e., lane). The third step entailed applying shockwave analysis on the microscopic level to determine the backward formation and backward recovery waves for each lane-specific queue. This was used to mainly identify the queues and the spillbacks past the upstream edge of the polygon, which is considered the zero reference of our study. The results of this process and other information were used in estimating the other MOEs for the defined area on the signalized intersection, as will be described in Section IV. It is worth mentioning here that we assumed that a vehicle traveling at a speed less than or equal to the typical pedestrian speed of 4.5 km/h (1.2 m/s) is stopped.

IV. PROBLEM FORMULATION AND ESTIMATION APPROACHES

A. Problem Formulation

The new era of sharing information and “big data” has raised expectations to make mobility more predictable and controllable through a better utilization of data and existing resources. The realization of these opportunities

requires going beyond the existing traditional ways of collecting traffic data that are based either on fixed-location sensors or GPS devices with low spatial coverage or penetration rates and significant measurement errors, especially in congested urban areas [15]. *pNEUMA* is a first-of-its-kind experiment aiming to create the most complete urban dataset to study congestion. A swarm of 10 drones hovering over the central business district of Athens, Greece over multiple days to record traffic streams in a congested area of a 1.3 km² area with more than 100 km-lanes of road network, around 100 busy intersections (signalized or not), many bus stops and close to half a million trajectories. The aim of the experiment is to record traffic streams in a multi-modal congested environment over an urban setting using UAV that can allow the deep investigation of critical traffic phenomena. The *pNEUMA* experiment develops a prototype system that offers immense opportunities for researchers. This open science initiative creates a unique observatory of traffic congestion, a scale and order-of-magnitude higher than what was available till now, that researchers from different disciplines around the globe can use to develop and test their own models [15].

This study is built on the open data initiative of *pNEUMA*, which is a unique dataset that was acquired during a first of-its-kind experiment using a swarm of drones over a dense city center of Athens. This dataset consists of more than half a million detailed trajectories of almost every vehicle that was present in the study area. The dataset includes trajectories that were monitored by one single drone covering a wide area over the central district of Athens, Greece. Both major and minor roads, bus stops, and signalized intersections are included in the study area. The dataset includes trajectories from cars, taxis, powered two-wheelers, buses, medium and heavy vehicles [15]. In this study, we used part of *pNEUMA* dataset to estimate the measures of effectiveness including the maximum queue length, whether, when and where a spillback occurred, vehicle stops, vehicle travel time and delay, crash rates, and fuel consumption.

As mentioned in Section III, the first phase of our proposed approach was dividing each polygon into mini polygons, representing the lanes into each polygon using Google Earth. We visually determined the mini polygons (i.e., lanes) for each direction. The second phase was identifying which lane the vehicles were on. Using the instantaneous longitude and latitude, we were able to track each vehicle from upstream to downstream the specified area. Then, we created time-space diagrams (vehicle trajectories) and then linked this to the associated lane for each polygon. Fig. 4 depicts a spacetime diagram resulted from this process. The third phase was using shockwave analysis to determine when the queue starts spilling back at the onset of the yellow/red signal traffic indication. This information along with instantaneous

vehicle counts helped us characterize the signal phase timing for the traffic light at the intersection. For verification purposes, we matched between the vehicle counts per lane with the OD matrix (calculated from the trajectories). This process is summarized in Fig. 5.

B. Shockwave Analysis

According to the Lighthill-Whitham-Richards (LWR) traffic flow model, flow at every point along the road is a function of density [3]. The mobility of an abrupt shift in concentration is referred to as a shockwave. Traffic shockwave theory is generated from the LWR model and is used to analytically solve the partial differential equation (PDE) in the model [3]. Multiple shock waves are produced at signalized intersection as a result of the stop-and-go traffic caused by signal changes. It is safe to presume that during the green phase, where the queue is completely discharged, vehicles are forced to halt during the next red interval, which alters the flow and density of both arriving and stopped traffic. Such halt in traffic creates a shockwave of queued vehicles that moves upstream of the intersection [5, 7].

We built an automatic simplified model that receives the extracted vehicle trajectories as input. This allows the model to be used in real-time applications. To make it easier to see how traffic flow changes at a signalized crossing, the raw trajectory data is represented in Fig. 4. We identified the critical points [3, 4] for the purpose of checking every vehicle in the stream at the approach of interest and find the queues and spills back. The critical point is defined as that point in a vehicle trajectory after which the motion of vehicle changes significantly. Based on this methodology, the important spots on the vehicle trajectories that reflect the significant or irreversible changes in the motion of the cars along the route are determined.

After shockwave analysis and to assess the performance of signalized intersections under investigation, a number of performance indicators can also be retrieved based on microscopic models. Understanding the specifics of the traffic flow at the intersection at vehicle level requires the use of both shockwave analysis and microscopic models. Results of shockwave analysis can be useful for studying signal cycle lengths as well as figuring out how quickly shockwaves are generated and dissipated. Additionally, a thorough examination of the queue at an intersection or in any other situation where there is a halted flow can be done using microscopic models. In the next sections, each of these factors and performance indicators has been estimated and presented in detail.

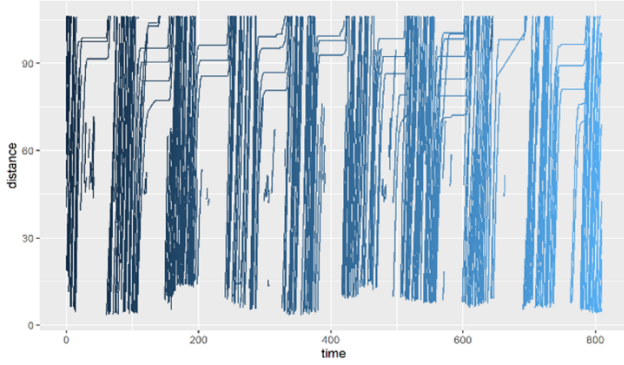


Fig. 4: Time-space diagram.

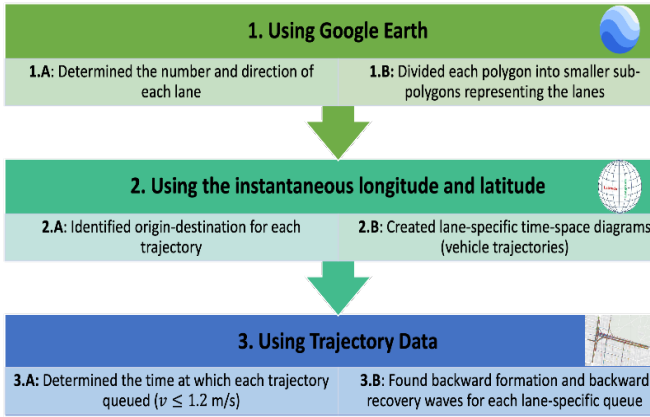


Fig. 5: Summary of proposed approach.

C. Computation of Queue Information

We assumed that a vehicle is queued when its speed is less than or equal to the typical pedestrian speed of 1.2 m/s. We constructed the time-space diagram for each lane in the approach. For each vehicle in the stream, we moved along its trajectory from the furthest upstream record within the defined area to its defined area exit record (see the green area shown in Fig. 1 and Fig. 2). We then identified the time stamps and locations (relative to the defined area upstream point) of the points at which the vehicles enter (backward forming shockwave) and exit (backward recovery shockwave) a queuing state. The furthest upstream record that the trajectory enters a queuing state was located. The spatial extent of a queue is computed relative to the downstream end of the defined area, which equals to the area length minus the distance relative to the furthest upstream area boundary. Spillbacks were identified in the area when entry into queuing was immediately prior to the upstream edge of the area.

D. Estimation of Travel Time

The model we developed determines the travel time for any given vehicle by providing that vehicle with a *timecard* upon its entry to any of the identified links. Subsequently, this timecard is retrieved when the vehicle leaves the link. The difference between these entries and exit times provides a direct measure of the link travel time

experienced by each vehicle as Equation (1) and Equation (2) show.

$$N(t) = N(t - \Delta t) + u(t) \quad (1)$$

$$TT(t) = H(t) \times N(t) \quad (2)$$

where $N(t)$ is the number of vehicles traversing the link at time t , $N(t - \Delta t)$ is the number of vehicles traversing the link in the previous time interval, and $u(t)$ is the system inputs, as described in Equation (1). Equation (2) represents the system output by measuring the average travel time for the CVs. $H(t)$ is a transition vector that converts the vehicle counts to travel times, as shown in Equation (2).

E. Estimation of Vehicles Stops

Each time a vehicle decelerates, the drop in speed is recorded as a partial stop, as demonstrated in Equation (3) [16]. The sum of these partial stops is also recorded. This sum, in turn, provides a very accurate explicit estimate of the total number of stops that were encountered along that particular link. This means that this method will often report that a vehicle has experienced more than one complete stop along a link. Multiple stops arise from the fact that a vehicle may have to stop several times before ultimately clearing the link stop line. This finding, while seldom recorded by or even permitted within macroscopic models, is a common observation within actual field data for links on which considerable over-saturation queues exist.

$$S(t_i) = \frac{u(t_i) - u(t_{i-1})}{u_f} \quad (3)$$

where:

$S(t_i)$: Instantaneous partial stop estimates at time

t_i , $u(t_i)$: Speed at instant t_i , $u(t_{i-1})$: Speed at instant t_{i-1} , and u_f : Roadway free-flow speed.

F. Estimation of Vehicle Delay

The model estimates vehicle delays every Deci-second as the difference in travel time between travel at the vehicle's instantaneous speed and travel at free-speed, as indicated in Equation (4) [17]. This model has been validated against analytical time-dependent queuing models, shockwave analysis, and the Canadian Capacity Guide, Highway Capacity Manual, and Australian Capacity Guide procedures [17, 18].

$$d(t_i) = \Delta t \left(1 - \frac{u(t_i)}{u_f} \right) \quad (4)$$

where:

Δt : The data processing time step (0.1 seconds in our case).

F. Estimation of Crash Rates

The safety model that was used here is based on US national crash statistics. The model computes the crash

risk for 14 different crash types as a function of the facility speed limit and a time-dependent measure of exposure. The use of a time-dependent measure of exposure allows the model to capture differences in the crash risk that result from differences in the network efficiency. The model also computes the vehicle damage and level of injury to the passengers involved in the crash based on the vehicle's instantaneous speed. The use of the instantaneous speed means that the crash damage and injury level is responsive to the level of congestion. Consequently, the model can capture the safety impacts of operational-level alternatives including Intelligent Transportation Systems. By multiplying the distance-based crash rate by the facility free-speed, it was possible to estimate a time-based crash rate. The advantage of a time-based crash rate is that the rate level of exposure increases with higher levels of congestion even though vehicles might not necessarily travel longer distances. More information can be found here [19].

$$\text{CrashRate}_i = e^{a_1^i * u_f + a_2^i} \quad \forall 1: 15 \quad (5)$$

where:

a_1 : Regression Coefficient a_1 .

a_2 : Regression Coefficient a_2 .

u_f : Free-flow Speed

G. Fuel Consumption

To find Fuel consumption, we used the Virginia Tech Comprehensive Power-Based Fuel Consumption Model (VTCPFM). VT-CPFM is a microscopic fuel consumption model based on instantaneous power; the detailed VT-CPFM model is described in the original paper by Rakha et al., which also includes a MATLAB script to run the model [20].

Other models either require calibration of specific parameters from laboratory or field testing or produce a bang-bang control. VT-CPFM avoids both of these problems: because data collection is not always feasible, VT-CPFM uses only publicly available data. Additionally, because the function for fuel consumption is a second-degree polynomial with respect to vehicle specific power (VSP), the partial derivative with respect to torque is a function of torque and the bang-bang control is not produced [20]. The model also can be used for different vehicle classes including light-duty vehicles [20], heavy-duty vehicles [21], and buses [22].

First, power is calculated using Equation (6), as follows:

$$P(t_i) = \left(\frac{R(t_i) + 1.04ma(t_i)}{3,600\eta_d} \right) * v(t_i) \quad (6)$$

where:

$P(t_i)$ = power at time step t_i (kW), m = vehicle mass (kg), $a(t_i)$ = vehicle acceleration at time

step t_i (m/s^2), $v(t_i)$ = vehicle speed at time step t_i (km/h), η_d = driveline efficiency, and

$R(t_i)$ = resistance force at time step t_i (N).

The resistance force is calculated with Equation (7), as follows:

$$R(t_i) = \frac{\rho}{25.92} C_D C_h A_f v(t_i)^2 + 9.8066m \frac{c_r}{1,000} (C_1 v(t_i) + C_2) + 9.8066mG(t_i) \quad (7)$$

where:

ρ = density of air (1.2256 kg/m^3 at sea level and 15°C), C_d = vehicle drag coefficient (unitless),

C_h = correction factor for elevation [which equals $1 - 0.085H$ where H is elevation (km)], A_f = vehicle frontal area (m^2),

$G(t_i)$ = roadway grade at time step t_i , and c_r , c_1 , and c_2 = rolling resistance parameters (unitless) [20].

Then, fuel consumption, $FC(L/s)$, is calculated by using Equation (8). The alpha values are calculated by using time, power, and fuel consumed from the EPA city and highway test cycles. A detailed list of required variables and potential sources for the VT-CPFM can be found in [20].

$$FC(t_i) = \begin{cases} a_0 + a_1 P(t_i) + a_2 P(t_i)^2 & \forall P(t_i) \geq 0 \\ a_0 & \forall P(t_i) < 0 \end{cases} \quad (8)$$

where:

a_0 , a_1 and a_2 are vehicle-specific model constants that are calibrated for each vehicle.

V. RESULTS AND DISCUSSION

Using a microscopic approach and based on shockwave analysis that considers the mobility and interaction of individual vehicles, we estimated the MOEs of an approach to a signalized intersection using UAV data. We constructed the time-space diagrams for each lane on the studied approach, as shown in Fig. 1 and Fig. 2. The green polygon consists of five lanes (four lanes plus a left turn pocket lane). We labeled the pocket lane as follows: the leftmost lane as Lane 1 and increased the counter until the rightmost lane, which is labeled Lane 5. The total number of vehicles in the area is 750 during the monitoring period. We also identified the distribution of the vehicle types in each lane as shown in TABLE I. In the table, a vehicle may be counted multiple times as we were able to capture the vehicles that make lane-change movement from a lane to another during the monitoring period (See TABLE II). However, a vehicle is counted one time in each lane at the end. We also investigated the 95th percentile and found it to be about 42 km/hr as shown in Fig. 6.

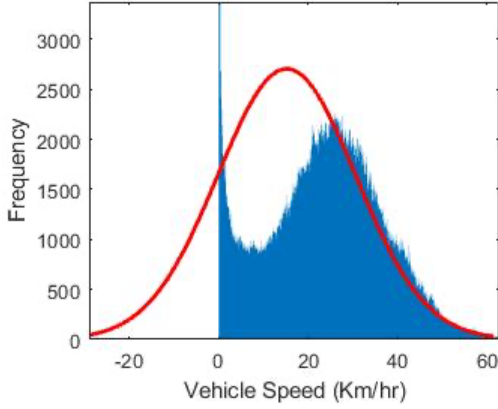


Fig. 6: Vehicle speed distribution.

TABLE I: Total number of vehicles for each Vehicle types per lane.

Vehicle Type	Lane 1	Lane 2	Lane 3	Lane 4	Lane 5
Light- & medium-duty	124	210	277	195	69
Motorcycle	24	53	124	160	66
Heavy-duty	1	3	4	4	3
Bus	0	1	1	9	11
Total	149	267	406	368	149

TABLE II: Lane changes of each Vehicle type.

Vehicle Type	Number of Vehicles	Number of Lane Changes
Light- & medium-duty	491	384
Motorcycles	237	190
Heavy-duty	8	7
Bus	14	8
Total	750	589

A. Queue Information

Using the information extracted from the time-space diagram of each lane, we were able to identify the length of each queue that was formed in each lane during the monitoring period, as shown in TABLE III. The table shows the queue length that occurred on each lane, when, and where it was occurred (i.e., the latitude (lat) and longitude (long) of the beginning of the queue and the end). The table demonstrates that the maximum queue length in the green polygon occurred in Lane 2 (the leftmost upstream of the left turn pocket lane) at a length of 102.7m (between the coordinates of (37.99225, 23.73141) and (37.99280, 23.73154)), which happened at time of 350.2s after the beginning of the monitoring period. Moreover, we used the time-space diagram to identify spillbacks on each lane during the monitoring period. TABLE IV summarizes the results for the various spillbacks. It shows that there were two spillbacks as follows: one in Lane 2 (middle-left lane), which is also recorded as the maximum queue length; and the other one in Lane 3 (middle lane) - both occurred at time 350.2s after the beginning of the monitoring period.

TABLE IV: The spillbacks information.

Lane	Timestamp (s)
Lane 2	350.20
Lane 3	350.20

B. Travel Time

Our model to determine the travel time on each lane is a microscopic based on Equation (1) and Equation (2). The model determines the link travel time for any given vehicle by providing that vehicle with a timecard upon its entry and exit from any link. The results of estimating the travel time on each lane per the vehicle types is shown in TABLE V and per the traffic movement of each vehicle type is shown in TABLE VI. The tables show that the maximum travel time occurred by a heavy-duty vehicle on Lane 3 (i.e., part of the through traffic movement) and is equal to about 32s. They also show that Lane 5 has the highest average travel time for all vehicles traveling through the study area. This could be as it is the closest lane to the parking lane and to the curbside, which pedestrians usually use. The second highest average travel time was for Lane 2, which is part of the left turn traffic movement.

TABLE V: Travel time on each lane per the number of vehicle types (s).

Vehicle Type	Lane 1	Lane 2	Lane 3	Lane 4	Lane 5
Light- & medium-duty	20.29	23.27	19.48	13.58	13.14
Motorcycles	9.02	9.70	10.53	9.93	30.20
Heavy-duty	2.08	4.80	31.99	22.74	9.28
Bus	-	1.40	5.36	9.45	16.09
Total	18.35	20.29	16.84	11.99	20.84

TABLE VI: Travel Time per movement for each vehicle type (s).

Vehicle Type	Left Turn (Lane 1 & 2)	Through (Lane 3, 4, & 5)
Light- & medium-duty	22.17	16.55
Motorcycles	9.49	13.97
Heavy-duty	4.12	22.43
Bus	1.40	12.73
Total	19.60	15.55

C. Vehicle Stops

To calculate vehicle stops, we used a microscopic model that computes instantaneous partial and full stops for undersaturated and oversaturated conditions in signalized intersection by using second-by-second speed measurements as described in Equation (4) [17]. This model has shown that there is a significant impact of vehicle stops on fuel consumption and emissions [23]. The model indicates that the vehicle fuel consumption rate is more sensitive to cruise-speed levels than to vehicle stops [23]. TABLE VII shows the number of vehicles stops on each lane per the number of vehicle types. It shows that vehicles on Lane 2 experienced the highest number of stops,

TABLE III: The queue information on each lane.

Lane	Queue length (m)	Timestamp (s)	Start lat	Start long	End Lat	End long
Lane 1	25.0	565.04	37.99190	23.73136	37.99211	23.73140
Lane 2	102.7	350.20	37.99225	23.73141	37.99280	23.73154
Lane 3	102.2	346.00	37.99229	23.73139	37.99280	23.73150
Lane 4	97.6	529.56	37.99275	23.73148	37.99275	23.73148
Lane 5	98.6	783.12	37.99200	23.73121	37.99277	23.73142

followed by Lane 3. It also shows that heavy-duty vehicles experienced the highest number of stops, which occurred in Lane 3, followed by light- and medium-duty vehicles experience in Lane 2. Moreover, TABLE VIII shows that the total number of vehicles turning left experienced stops more than vehicles going through the intersection.

TABLE VII: Vehicles stops on each lane per the number of vehicle types.

Vehicle Types	Lane 1	Lane 2	Lane 3	Lane 4	Lane 5
Light- & medium-duty	0.12	0.40	0.28	0.23	0.19
Motorcycle	0.11	0.21	0.24	0.21	0.24
Heavy-duty vehicle	0.09	0.11	0.68	0.26	0.04
Bus	-	0.01	0.07	0.10	0.13
Total	0.12	0.36	0.27	0.20	0.20

TABLE VIII: Vehicle stops per movement for each vehicle type.

Vehicle Type	Left Turn (Lane 1 & 2)	Through (Lane 3, 4, & 5)
Light- & medium-duty	0.30	0.24
Motorcycle	0.18	0.22
Heavy-duty vehicle	0.10	0.35
Bus	0.01	0.11
Total	0.27	0.23

D. Vehicle Delay

Delay at signalized intersections is considered a significant factor in determining the level of service at the intersection approaches as well as a parameter that is used in the optimization of traffic signal timings. In this study, we used a microscopic approach to obtain delay estimates in the study area. Within the model, delay is estimated for each individual vehicle by calculating, for each traveled link, the difference between the vehicle's recorded travel time and the travel time that the vehicle would have experienced on the link at free speed, as shown in Equation (4) [17]. TABLE IX shows the results of travel delay on each lane of the study area divided by the number of each vehicle type. When all vehicle types are considered, Lane 2 has the highest delay of all lanes, followed by Lane 5 and Lane 1. This depicts that the vehicles turning to left are more likely to experience higher delay than vehicles traveling through the intersection, which is clearly shown in TABLE X. Moreover, the highest delay recorded was for heavy-duty vehicles traveling through Lane 3 and is equal to 20.63s. TABLE X also shows

that light- & medium-duty vehicles and motorcycles have higher travel delay when turning to the left. However, heavy-duty vehicles and buses have higher travel delays when traveling through the intersection.

TABLE IX: Global average delay on each lane per vehicle type (s).

Vehicle Type	Lane 1	Lane 2	Lane 3	Lane 4	Lane 5
Light- & medium-duty	11.63	15.77	10.30	7.51	8.98
Motorcycle	8.55	7.40	5.57	4.01	16.68
Heavy-duty vehicle	1.18	1.87	20.63	13.89	1.53
Bus	-	0.71	2.75	3.88	8.12
Total	11.06	13.90	8.94	5.97	12.18

TABLE X: Travel delay per movement for each vehicle type (s).

Vehicle Type	Left Turn (Lane 1 & 2)	Through (Lane 3, 4 & 5)
Light- & medium-duty	14.23	9.12
Motorcycles	7.76	6.95
Heavy-duty	1.70	12.97
Bus	0.71	6.05
Total	12.88	8.28

E. Crash Rates

We used a safety model that is based on US national crash statistics as described in [19]. The model computes the crash risk for 14 different crash types as a function of the facility speed limit and a time-dependent exposure measure as shown in Equation 5. The model can capture the safety impacts of operational-level alternatives including Intelligent Transportation Systems (ITS). TABLE XI shows the crash rates for the 14 crash types included in the model. Results show that the rear-end crashes in the same traffic way and same direction has the highest crash rate in the intersection, followed by forward impact of a single driver. The total crash rate was found to be about 0.038 crashes for every vehicle mile traveled (VMT).

TABLE XI: Crash rates for 14 crash types (crashes/VMT).

Crash Type	Crash Rate
Single Driver - Right Roadside Departure	0.00296
Single Driver - Left Roadside Departure	0.00243
Single Driver - Forward Impact	0.00544
Same Traffic Way and Same Direction - Rear-End	0.00597
Same Traffic Way and Same Direction - Forward Impact	0.00023
Same Traffic Way and Same Direction - Sideswipe/Angle	0.00179

Same Traffic Way and Opposite Direction - Head-On	0.00041
Same Traffic Way and Opposite Direction - Forward Impact	0.00090
Same Traffic Way and Opposite Direction - Sideswipe/Angle	0.00244
Change Traffic Way and Vehicle Turning – Turn Across Path	0.00366
Change Traffic Way and Vehicle Turning – Turn Input Path	0.00434
Intersecting Paths – Perpendicular Crash	0.00267
Backing Vehicle	0.00043
Other or Unknown	0.00367
Total Crash Rate	0.03760

F. Fuel Consumption

Using traffic data from drones, we investigated the use of Virginia Tech Comprehensive Power-Based Fuel Consumption Model (VT-CPFM). We investigated the applicability of VT-CPFM as a microscopic fuel consumption model based on instantaneous power [20]. VT-CPFM function for fuel consumption is a second-degree polynomial with respect to vehicle specific power (VSP) using Equation (6) [20]. We used VT-CPFM in this study for the different vehicle classes including light-duty vehicles [20], heavy-duty vehicles [21], and buses [22] that passed through the study area. We found that the total fuel consumption resulted from all the 750 vehicles passing through the approach is about 207L during the 14-min study period; about 0.28L per vehicle; or 0.25 L/s.

VI. CONCLUSION

Traffic delays, fuel consumption, stopping, spillbacks, and queues are key parameters in determining the quality of service at signalized intersections. This study investigates the use of drone raw data at a busy signalized intersection in Athens, Greece to find the corresponding MOEs. Collecting traffic data using flying drones is an emerged technology that has shown promising future in a wide range of applications because drones are easy to deploy and introduce minimum interruptions to the traffic stream of the studied area.

This study builds on the open data initiative of the *pNEUMA* experiment that used a swarm of drones over a dense city center of Athens. Using a microscopic approach and shockwave analysis on the data extracted from real-time video, we determined the various MOEs of the signalized approach on a busy three-way signalized intersection in Athens, Greece. Specifically, we estimated the measures of effectiveness including the maximum queue length, whether, when and where a spillback occurred, vehicle stops, vehicle travel time and delay, crash rates, and vehicle fuel consumption. One challenge in this study was the duration of the data. Given that the proposed method of this study is intended to be used in a real time applications and there are some restrictions on storing big data in each controller's intersection; it was suggested to use a 14-min video data to evaluate the performance of signalized intersections. Results of the various MOEs were found to be promising, which confirms

that the use of traffic data collected by drones has many advantages.

In this study, we found that understanding the specifics of the traffic flow on the microscopic level at intersections requires the use of a combination of methods – shockwave analysis and other microscopic models in our case. This combination can be useful for studying performance at intersections as well as figuring out how quickly shockwaves are generated and dissipated. Additionally, a thorough analysis of the queue at an intersection or in any other situation where there is an interrupted flow can be done using the extracted parameters and shockwave speeds.

We also found that the use of microscopic approaches to computing the MOEs at signalized intersections in real-time is achievable and desirable. Such models have the ability to track individual vehicle movements within street networks and thus capture traffic conditions on various MOEs, ranging from highly under-saturated to highly oversaturated conditions. The results of these models have higher accuracy than other aggregate models given that the approach captures vehicle transient behavior. Specifically, at the delay level, microscopic models can determine the delay incurred by an individual vehicle while traveling without the need for macroscopic formulas. This allows them to evaluate uniform and overflow delay, or delays in under-saturated and over-saturated traffic conditions, allowing for the evaluation of complex traffic situations. In addition, the ability to record vehicle speed and position on a second-by-second basis further allows the recording of speed profiles and the direct estimation of deceleration, stopped and acceleration delays, crash risk, and vehicle fuel consumption levels, as demonstrated in this study.

VII. ACKNOWLEDGEMENT

Authors would like to thank *pNEUMA* project for providing the dataset that was used in this study.

REFERENCES

- [1] M. A. Aljamal, H. M. Abdelghaffar, and H. A. Rakha, "Real-time estimation of vehicle counts on signalized intersection approaches using probe vehicle data," *IEEE Transactions on Intelligent Transportation Systems*, vol. 22, no. 5, pp. 2719–2729, 2020.
- [2] M. A. Aljamal, H. M. Abdelghaffar, & H. A. Rakha, "Developing a neural–kalman filtering approach for estimating traffic stream density using probe vehicle data," *Sensors*, vol. 19, no. 19, p. 4325, 2019.
- [3] H. X. Liu, X. Wu, W. Ma, and H. Hu, "Real-time queue length estimation for congested signalized intersections," *Transportation research part C: emerging technologies*, vol. 17, no. 4, pp. 412–427, 2009.

- [4] X. J. Ban, P. Hao, and Z. Sun, "Real time queue length estimation for signalized intersections using travel times from mobile sensors," *Transportation Research Part C: Emerging Technologies*, vol. 19, no. 6, pp. 1133–1156, 2011.
- [5] J. Cao, M. Hadiuzzaman, T. Z. Qiu, and D. Hu, "Realtime queue estimation model development for uninterrupted freeway flow based on shockwave analysis," *Canadian Journal of Civil Engineering*, vol. 42, no. 3, pp. 153–163, 2015.
- [6] S. Heshami and L. Kattan, "A queue length estimation and prediction model for long freeway offramps," *Journal of Intelligent Transportation Systems: Technology, Planning, and Operations*, vol. 25, no. 1, pp. 122–134, 2021. [Online]. Available: <https://doi.org/10.1080/15472450.2020.1846125>
- [7] M. A. Khan, W. Ectors, T. Bellemans, D. Janssens, and G. Wets, "Unmanned aerial vehicle-based traffic analysis: A case study for shockwave identification and flow parameters estimation at signalized intersections," *Remote Sensing*, vol. 10, no. 3, 2018.
- [8] X. Gu, M. Abdel-Aty, Q. Xiang, Q. Cai, and J. Yuan, "Utilizing UAV video data for in-depth analysis of drivers' crash risk at interchange merging areas," *Accident Analysis and Prevention*, vol. 123, no. November 2018, pp. 159–169, 2019. [Online]. Available: <https://doi.org/10.1016/j.aap.2018.11.010>
- [9] S. S. C. Congress, A. J. Puppala, A. Banerjee, and U. D. Patil, "Identifying hazardous obstructions within an intersection using unmanned aerial data analysis," *International Journal of Transportation Science and Technology*, no. xxxx, 2020. [Online]. Available: <https://doi.org/10.1016/j.ijst.2020.05.004>
- [10] C. N. Yahia, S. E. Scott, S. D. Boyles, and C. G. Claudel, "Unmanned aerial vehicle path planning for traffic estimation and detection of non-recurrent congestion," *arXiv*, pp. 1–26, 2018.
- [11] N. A. Khan, N. Z. Jhanjhi, S. N. Brohi, R. S. A. Usmani, and A. Nayyar, "Smart traffic monitoring system using Unmanned Aerial Vehicles (UAVs)," *Computer Communications*, vol. 157, no. January, pp. 434–443, 2020. [Online]. Available: <https://doi.org/10.1016/j.comcom.2020.04.049>
- [12] B. S. Freeman, J. A. Al Matawah, M. Al Najjar, B. Gharabaghi, and J. The, "Vehicle stacking estimation' at signalized intersections with unmanned aerial systems," *International Journal of Transportation Science and Technology*, vol. 8, no. 2, pp. 231–249, 2019.
- [13] R. Ke, Z. Li, S. Kim, J. Ash, Z. Cui, and Y. Wang, "Real-time bidirectional traffic flow parameter estimation from aerial videos," *IEEE Transactions on Intelligent Transportation Systems*, vol. 18, no. 4, pp. 890–901, 2016.
- [14] R. Ke, S. Feng, Z. Cui, and Y. Wang, "Advanced framework for microscopic and lane-level macroscopic traffic parameters estimation from uav video," *IET Intelligent Transport Systems*, vol. 14, no. 7, pp. 724–734, 2020.
- [15] E. Barmounakis and N. Geroliminis, "On the new era of urban traffic monitoring with massive drone data: The pneuma large-scale field experiment," *Transportation research part C: emerging technologies*, vol. 111, pp. 50–71, 2020.
- [16] H. Rakha, Y.-S. Kang, and F. Dion, "Estimating vehicle stops at undersaturated and oversaturated fixedtime signalized intersections," *Transportation Research Record*, vol. 1776, no. 1, pp. 128–137, 2001.
- [17] H. Rakha, M. Van Aerde, and J. Wang, "A comparison of two alternative traffic simulation models: Transyt vs," *INTEGRATION*, 1993.
- [18] H. Rakha, M. Van Aerde, K. Ahn, and A. Trani, "Requirements for evaluation of environmental impacts of intelligent transportation systems using speed and acceleration data," *Transportation Research Record*, vol. 1738, pp. 56–67, 2000.
- [19] A. Avgoustis, H. Rakha, and M. Van Aerde, "Framework for estimating network-wide safety impacts of intelligent transportation systems," in *Intelligent transportation systems safety and security conference*, vol. 2, 2004.
- [20] H. A. Rakha, K. Ahn, K. Moran, B. Saerens, and E. Van den Bulck, "Virginia tech comprehensive powerbased fuel consumption model: model development and testing," *Transportation Research Part D: Transport and Environment*, vol. 16, no. 7, pp. 492–503, 2011.
- [21] J. Wang and H. A. Rakha, "Fuel consumption model for heavy duty diesel trucks: Model development and testing," *Transportation Research Part D: Transport and Environment*, vol. 55, pp. 127–141, 2017.
- [22] W. Edwardes and H. Rakha, "Virginia tech comprehensive power-based fuel consumption model: modeling diesel and hybrid buses," *Transportation Research Record*, vol. 2428, no. 1, pp. 1–9, 2014.
- [23] H. Rakha and Y. Ding, "Impact of stops on vehicle fuel consumption and emissions," *Journal of Transportation Engineering*, vol. 129, no. 1, pp. 23–32, 2003.